

APPLICATIONS

2006 Honda Civic


KIT FEATURES

- DIN Head Unit Provision with pocket
- ISO DIN Head Unit Provision with pocket
- Double DIN Head Unit Provision
- ISO Stacked Head Unit Provision
- Stacked DIN Head Unit Provision



KIT COMPONENTS

- A) Radio Housing B) DDIN Trim Plate C) ISO Trim Plate D) Double DIN Brackets E) Pocket
F) (8) #8 Phillips Screws G) ISO Brackets

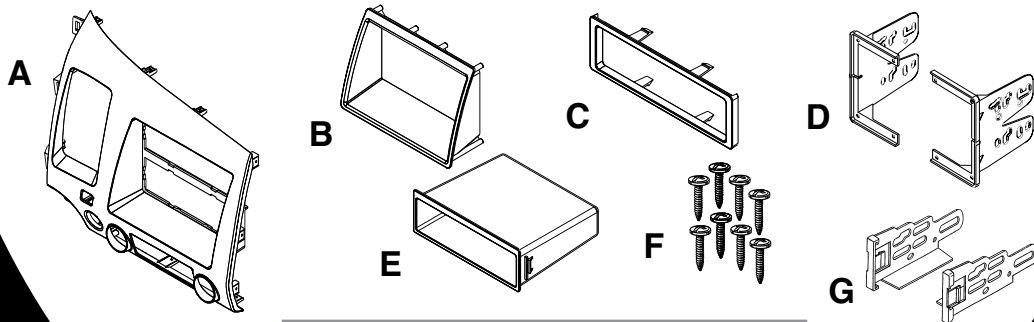

TOOLS REQUIRED:

Small Flat Screwdriver | Phillips Screwdriver | Socket Wrench




TABLE OF CONTENTS

Dash Disassembly

<i>2006 Honda Civic</i>	<i>1, 2</i>
--------------------------------------	--------------------

Kit Assembly:

<i>DIN Head Unit Provision.....</i>	<i>3</i>
--	-----------------

<i>ISO DIN Head Unit Provision</i>	<i>4</i>
---	-----------------

<i>Double DIN Head Unit Provision</i>	<i>5</i>
--	-----------------

<i>Stacked ISO DIN Head Unit Provision.....</i>	<i>6</i>
--	-----------------


<i>Stacked DIN Head Unit Provision.</i>	<i>7</i>
---	-----------------

<u>Final Assembly</u>	<i>8</i>
------------------------------------	-----------------


2006 HONDA CIVIC

- 1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2** Unclip and remove the panel below the steering wheel. (Figure A)
- 3** Remove the (1) Phillips screw exposed on the lower left side of the panel above the steering wheel and around the instrument cluster. (Figure B)
- 4** Unclip and remove the panel around top of steering wheel and instrument cluster. (Figure C)
- 5** Remove panel inside pocket below radio and climate controls then remove (2) 8 MM screws facing up behind panel. (Figure D)


A

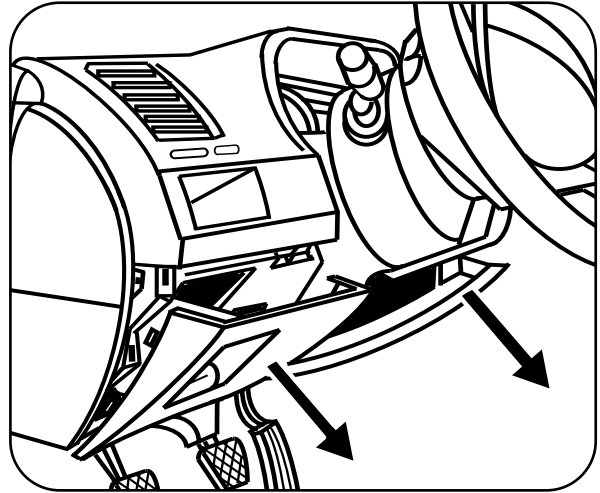


B

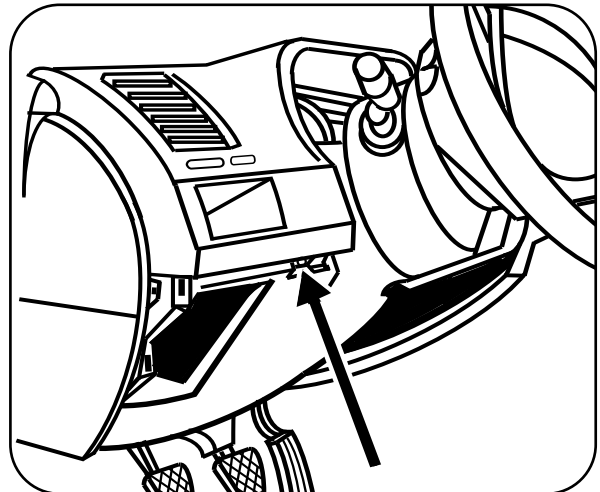

C


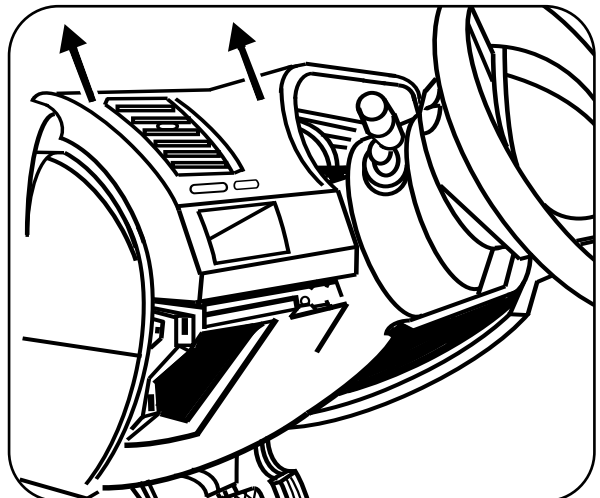


D

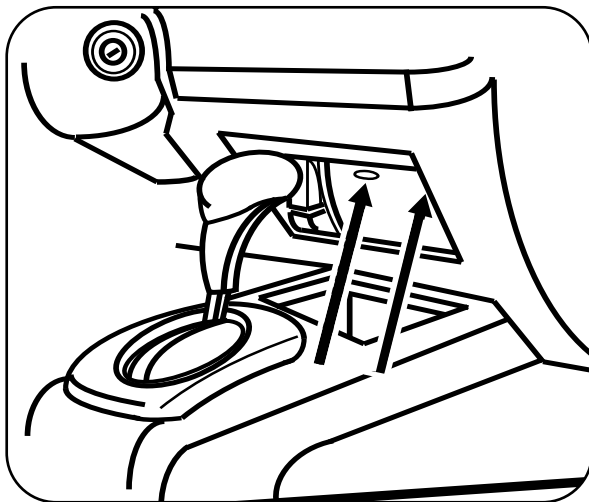

2006 HONDA CIVIC





- 6** Unclip and remove radio/climate control assembly. (Figure E)
- 7** Remove (3) Phillips screws securing the a/c vent to the radio/climate control panel. (Figure F)
- 8** Remove the (4) Phillips screws securing the climate control to the radio/climate control panel. (Figure F)
- 9** Remove the (2) Phillips screws securing the hazard switch to the radio/climate control panel. (Figure F)
- 10** Remove the (2) Phillips screws securing the passenger air bag on/off light to the radio/climate control panel. (Figure F)

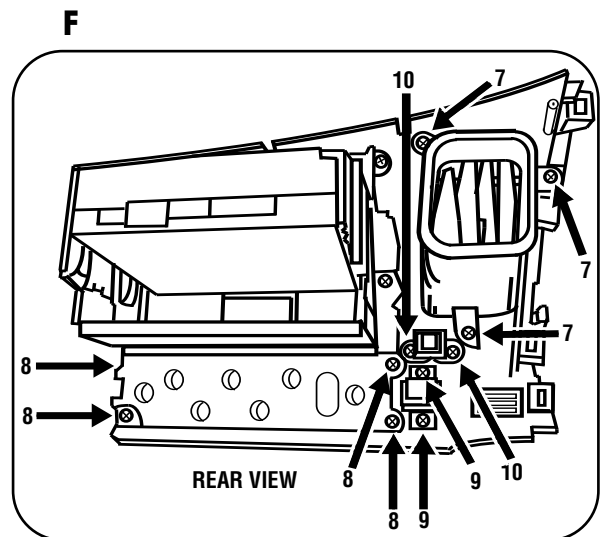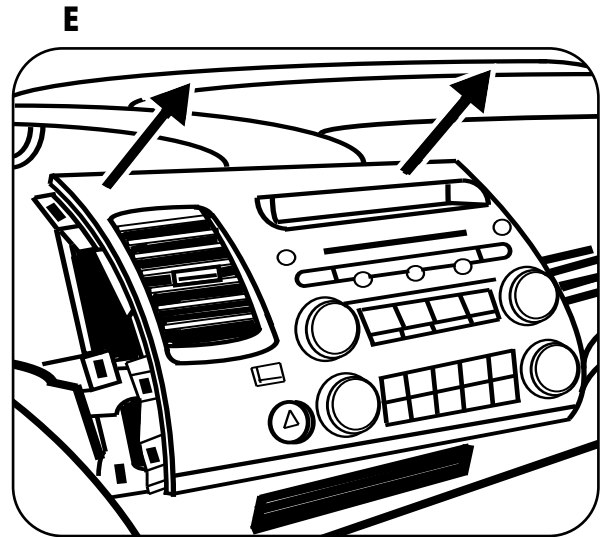

DIN HEAD UNIT PROVISION

NOTE: Secure the a/c vent, climate control, hazard switch, and the passenger air bag on/off light into the radio housing panel using the factory hardware. (Figure A)





- 1** Slide the pocket into the bottom section of the kit housing. (Figure B)
- 2** Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down. (Figure C)
- 3** Slide the aftermarket head unit into the cage and secure. (Figure D)

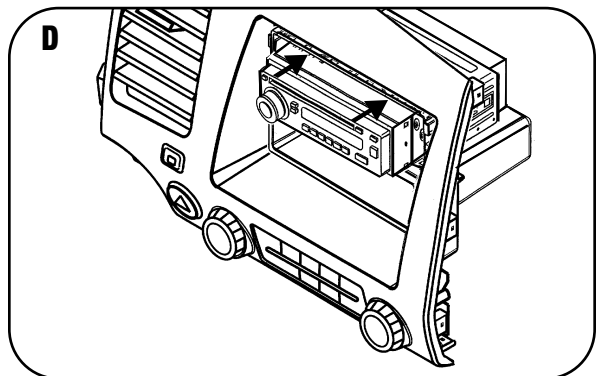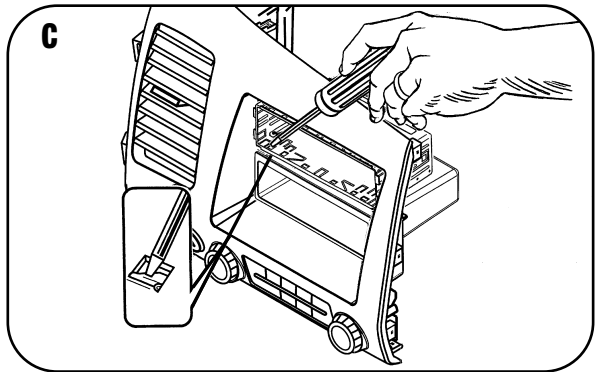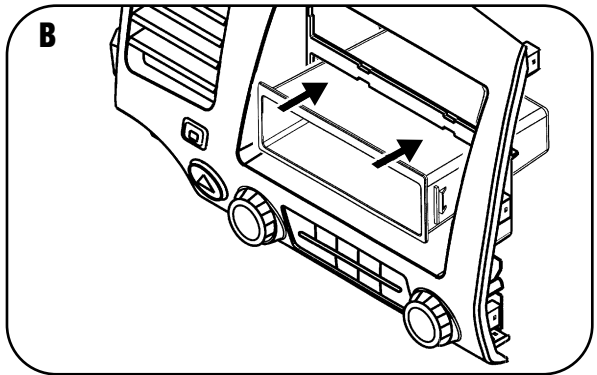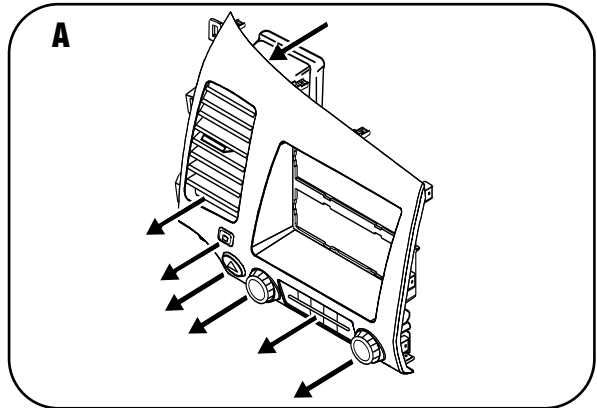

ISO DIN HEAD UNIT PROVISION

NOTE: Secure the a/c vent, climate control, hazard switch, and the passenger air bag on/off light into the radio housing panel using the factory hardware. (Figure A)





- 1** Slide the pocket into the bottom section of the kit housing. (Figure B)
- 2** Mount the ISO Brackets to the head unit with the screws supplied with the unit. (Figure C)
- 3** Slide the head unit into the radio opening until the side clips engage. (Figure D)
- 4** Snap the Trim plate into the Radio Housing. (Figure D)

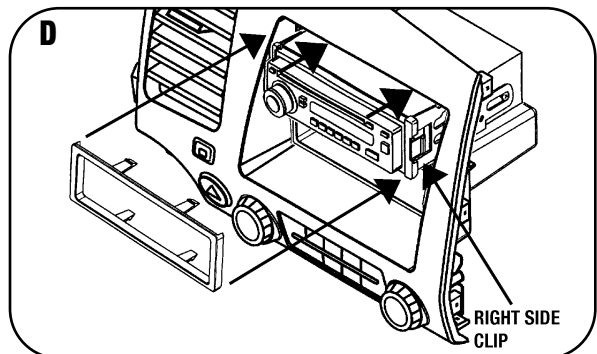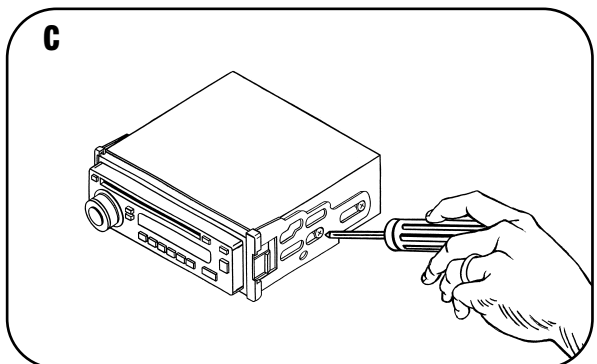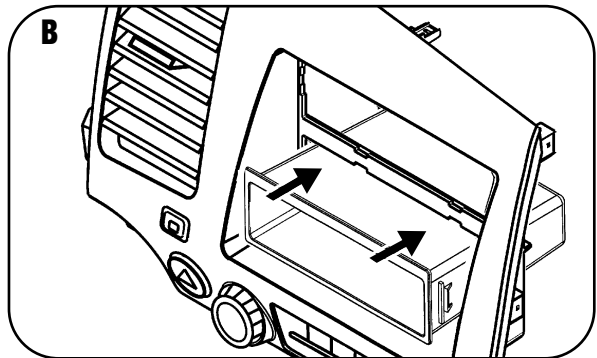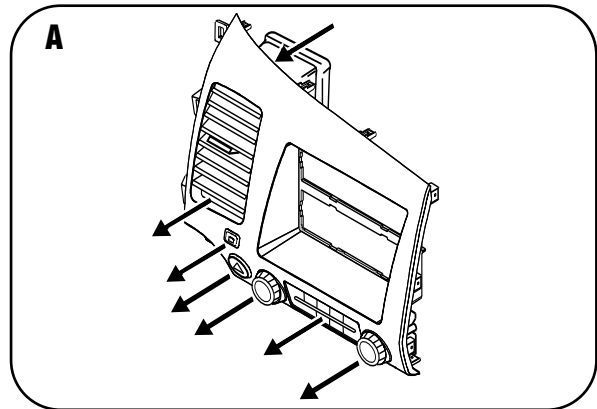

DOUBLE DIN HEAD UNIT PROVISION

NOTE: Secure the a/c vent, climate control, hazard switch, and the passenger air bag on/off light into the radio housing panel using the factory hardware. (Figure A)

- 1** Remove the center bar from the radio housing. (Figure B)
- 2** Attach the corresponding bracket to the DDIN head unit. (Figure C)
- 3** Insert the DDIN trim plate into the radio housing. (Figure D)
- 4** Position the bracket/radio assembly to the back of the radio housing and secure with the (8) Phillips screws provided. (Figure D)

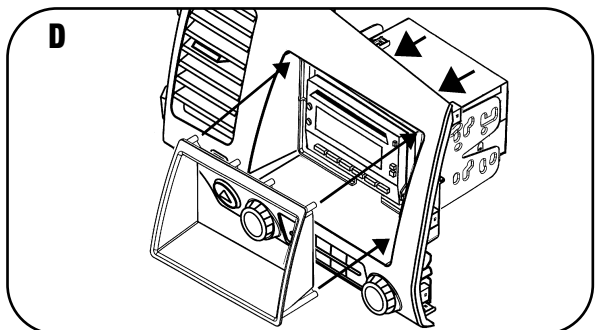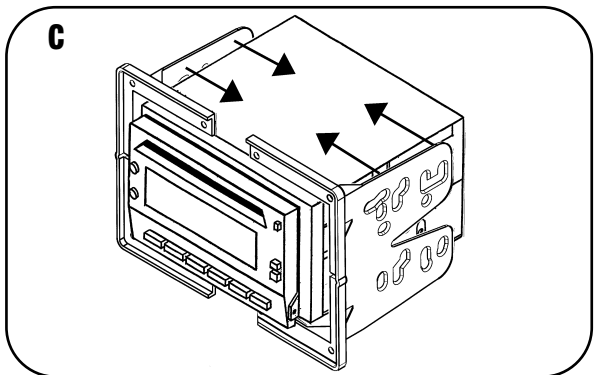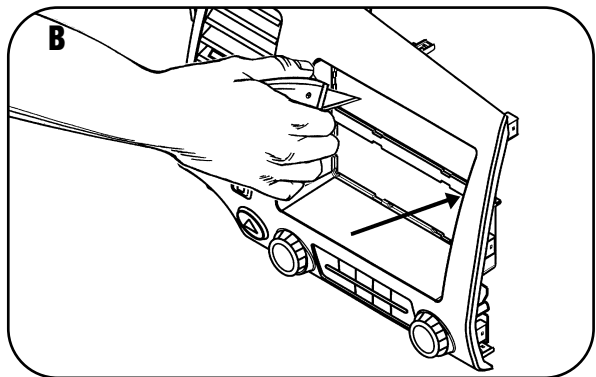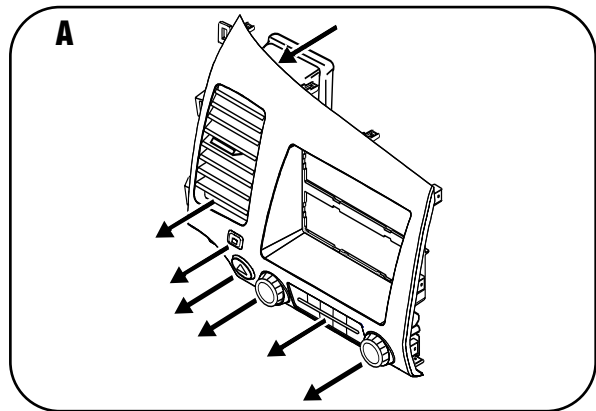


STACKED ISO DIN HEAD UNIT PROVISION


NOTE: Secure the a/c vent, climate control, hazard switch, and the passenger air bag on/off light into the radio housing panel using the factory hardware. (Figure A)

- 1** Remove the center bar from the radio housing. (Figure B)
- 2** Attach the corresponding bracket to the (2) ISO head units. (Figure C)
- 3** Insert the DDIN trim plate into the radio housing. (Figure D)
- 4** Position the bracket/radio assembly to the back of the radio housing and secure with the (8) Phillips screws provided. (Figure D)


A

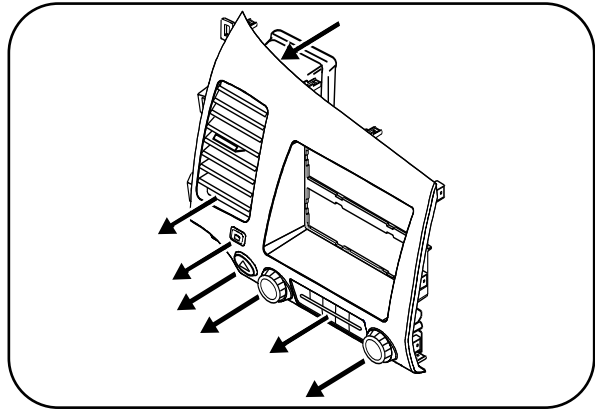


B

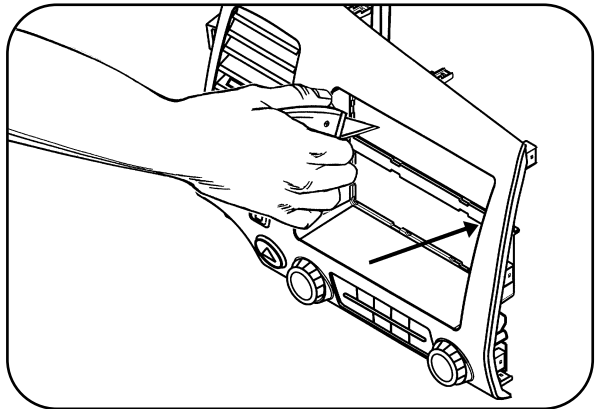

C

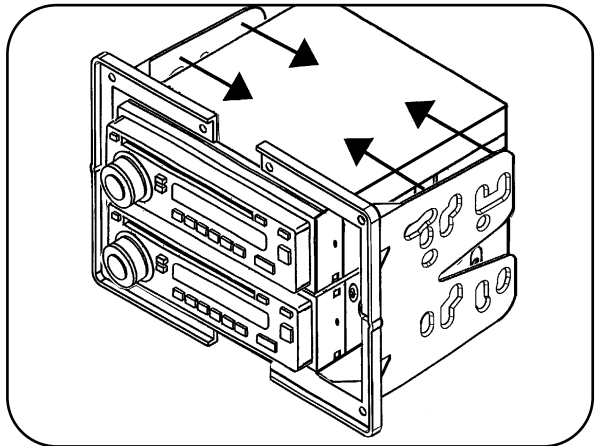

D

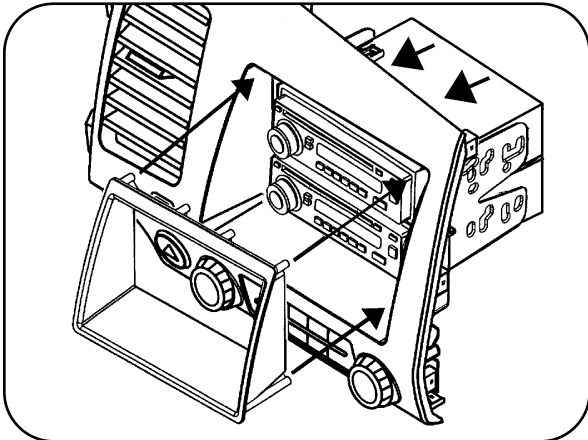


STACKED DIN HEAD UNIT PROVISION


NOTE: Secure the a/c vent, climate control, hazard switch, and the passenger air bag on/off light into the radio housing panel using the factory hardware. (Figure A)

- 1** Slide the DIN cages into the Radio Housing and secure by bending the metal locking tabs outward. (Figure B)
- 2** Slide the aftermarket head units into the cages and secure. (Figure C)

A

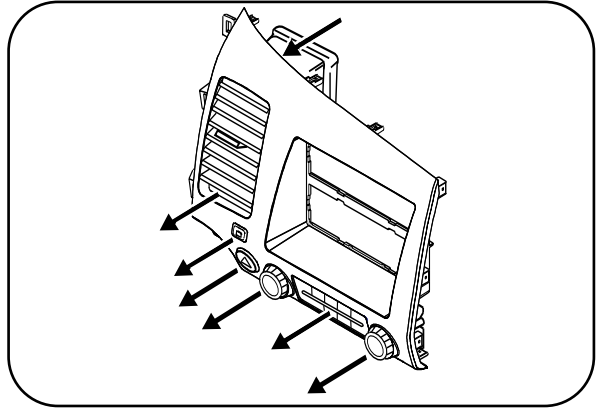

B

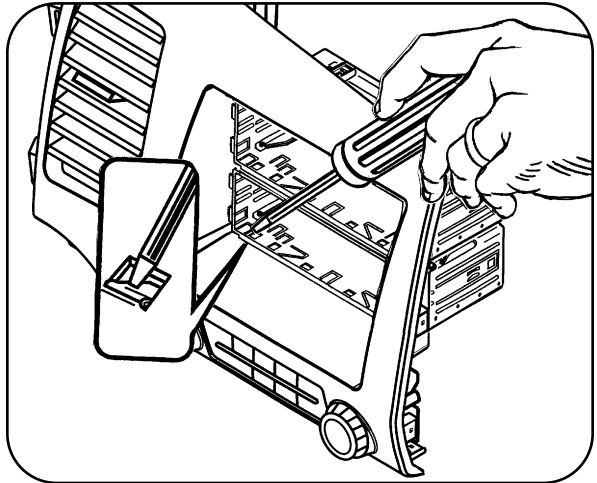

C

